


Ordering Code

2L	170	15	AC110V	J
Specification	Orifice Size	Port Size	Standard Voltage	Wiring
2L: 2/2 Way for Steam	170: 17 mm 200: 22 mm 300: 30 mm 500: 50 mm	10: 3/8" 35: 1 1/4" 15: 1/2" 40: 1 1/2" 20: 3/4" 50: 2" 25: 1"	DC12V DC24V AC24V 50Hz/60 Hz AC110V 50Hz/60 Hz AC220V 50Hz/60 Hz AC380V 50Hz/60 Hz	J: Terminal W: Lead wire


Symbol

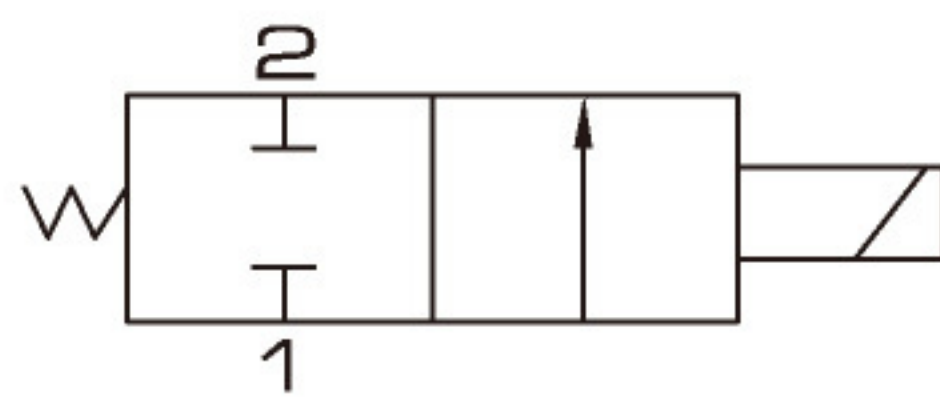

Specification

Model	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
Working Medium	Air, Water, Steam						
Operation	Direct						
Type	Normal Close						
Orifice	17 mm			22 mm	30 mm		50 mm
CV Value	4.8			12	20		48
Port Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Operation Fluid Viscosity	Below 20 CST						
Working-pressure	0.1 ~ 1.5 MPa						
Max. Test Pressure	2.25 MPa						
Max. Ambient Temperature	-10 ~ 180 °C						
Operating Voltage Tolerance	± 10%						
Material of Body	Brass						
Material of Oil Seal	PTFE						

Internal Structure

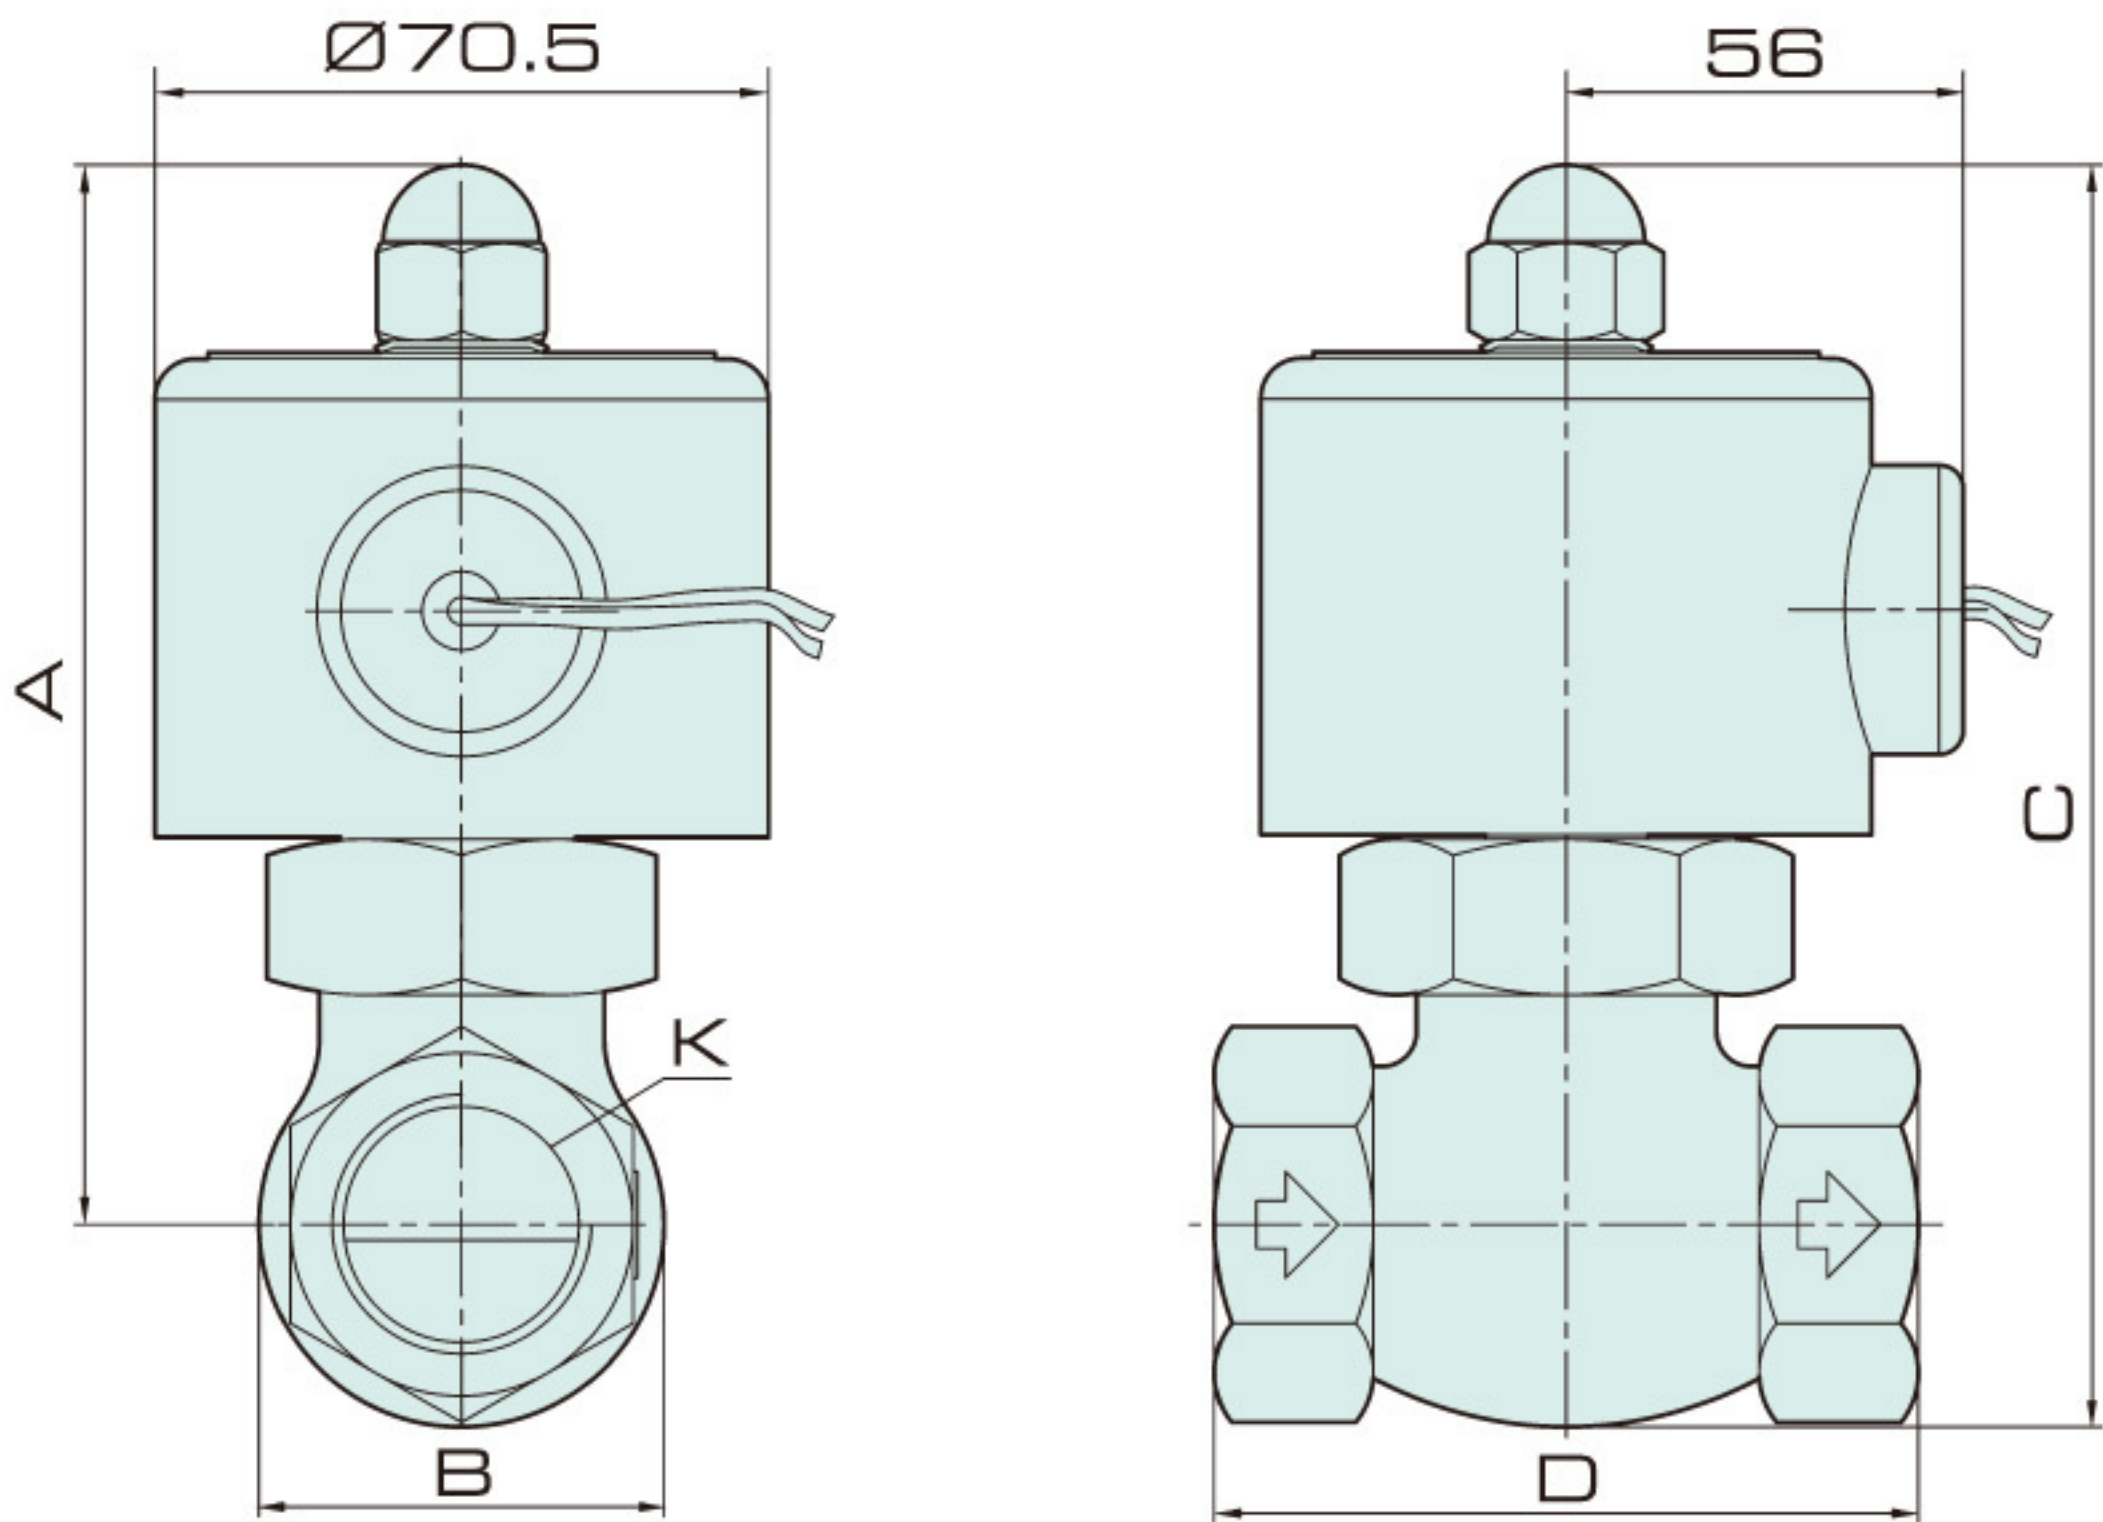

Dimension

Model	A	B	C	D	K
2L170-10	125	42	146	82	PT3/8"
2L170-15	125	42	146	82	PT1/2"
2L170-20	125	42	146	82	PT3/4"
2L200-25	136	52	162	90.5	PT1"
2L300-35	148	74	185	111	PT1 1/4"
2L300-40	148	74	185	111	PT1 1/2"
2L500-50	176	86	223	163	PT2"

Valve

J4V
J4V100
J4V200
J4V300
J4V400
5V
Manifold
JSY
5JV
MCS
JVT307
JEL
MVSD
VF
BM
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(Big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
BU
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV