



2P025-08-W


Valve

- J4V
- J4V100
- J4V200
- J4V300
- J4V400
- 5V
- Manifold
- JSY
- 5JV
- MCS
- JVT307
- JEL
- MVSD
- VF
- BM
- NAMUR
- 551
- JEL10
- 3VJZF
- Diaphragm
- JELVD
- 3V1
- Coil
- 2P**
- 2V
- 2W
- 2W(Big)
- 2L
- VX
- PU
- PU225
- 2Q
- JEL5404
- JEL6213
- BU
- Pulse
- JELJZF
- 4H
- TSV
- MPV
- 4HV
- HV, K
- 4R
- 4F210
- FV
- MSV
- JM
- ASC, RE
- QE, QEA
- ST
- HSV

Ordering Code

2P	025	06	AC110V	W
Specification 2P: 2/2 way	Orifice Size 025: 2.5 mm	Port Size 06: 1/8" 08: 1/4"	Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	Wiring W: Lead wire

Symbol

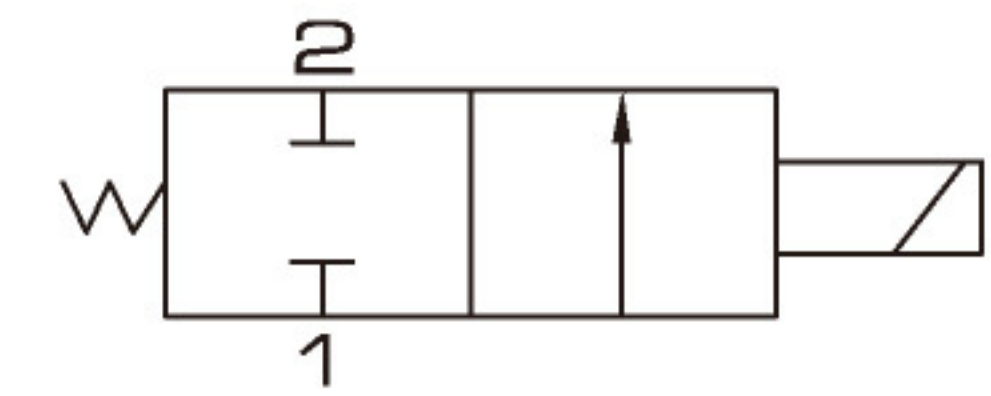

Specification

Model	2P025-06	2P025-08
Working Medium	Air, Water, Oil, Gas	
Operation	Direct	
Type	Normal Close	
Orifice	2.5 mm	
CV Value	0.23	
Port Size	1/8"	1/4"
Operation Fluid Viscosity	Below 20 CST	
Working-pressure	0 ~ 0.7 MPa	
Max. Test Pressure	1.0 MPa	
Max. Ambient Temperature	-10 ~ 80°C	
Operating Voltage Tolerance	± 10%	
Material of Body	Engineering Plastic	
Material of Oil Seal	NBR or VITON	

Overall Dimension

2P Series

