ISO9001:2015 C€


# ASC, RE Series Flow Control Valve


## • ASC, RE Series

Flow Control Valve





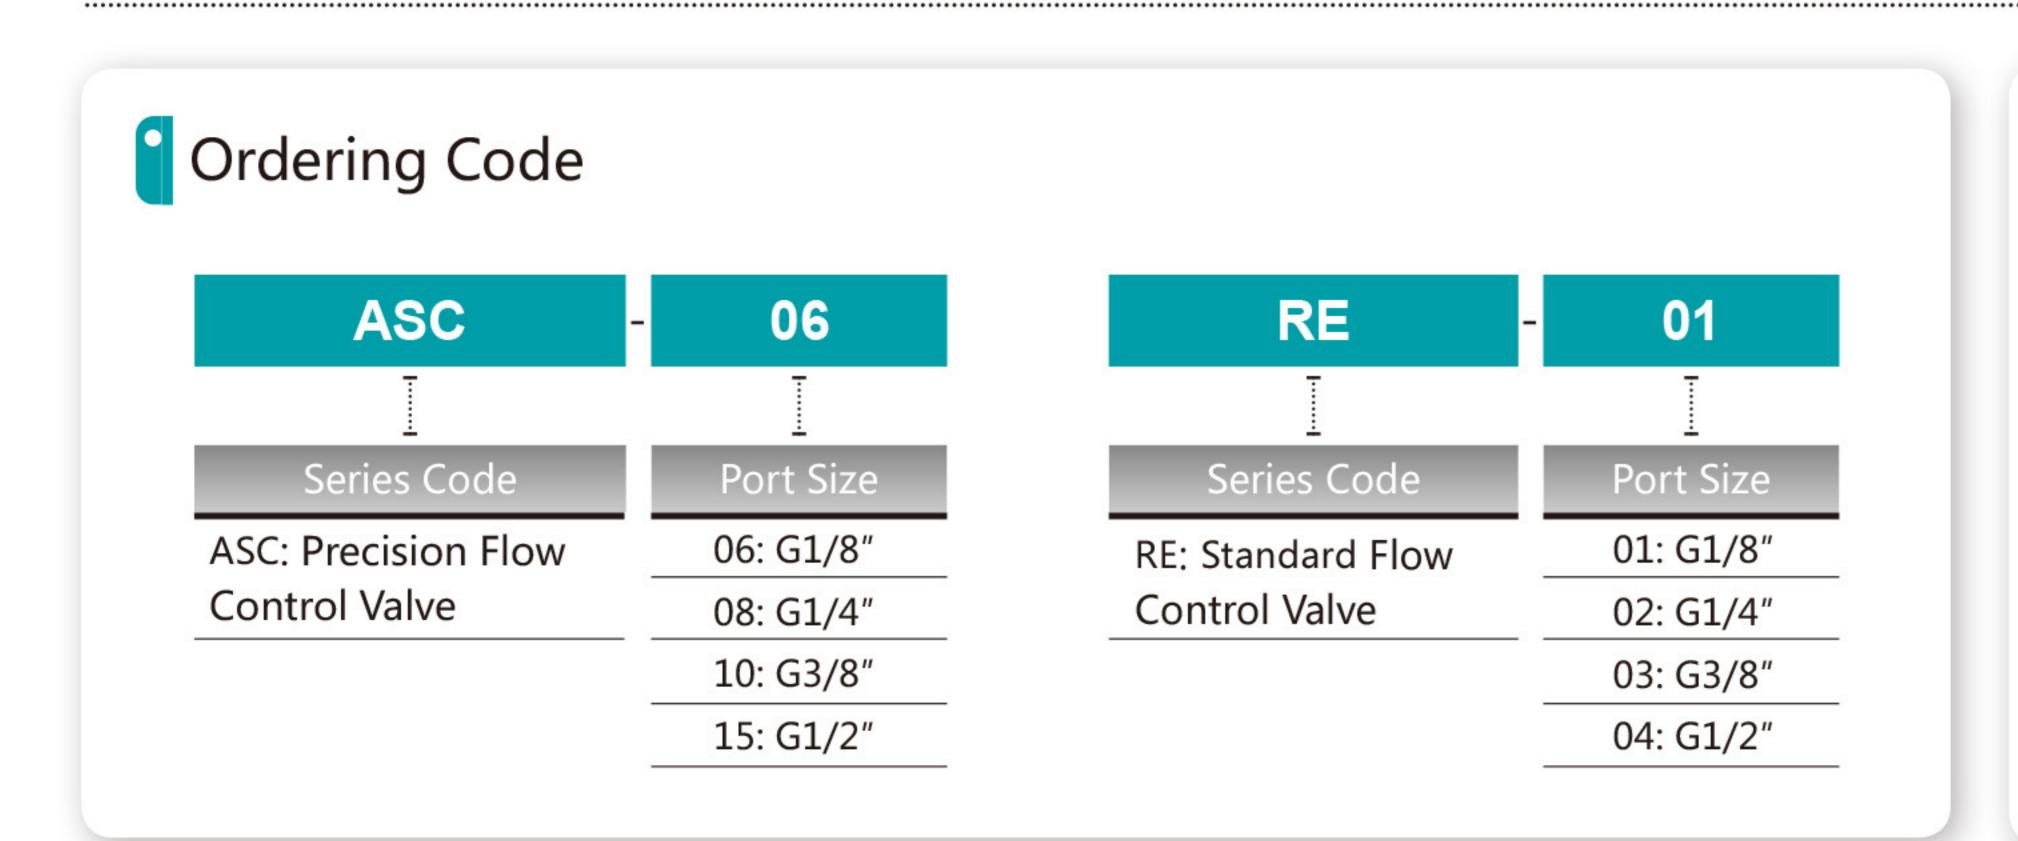

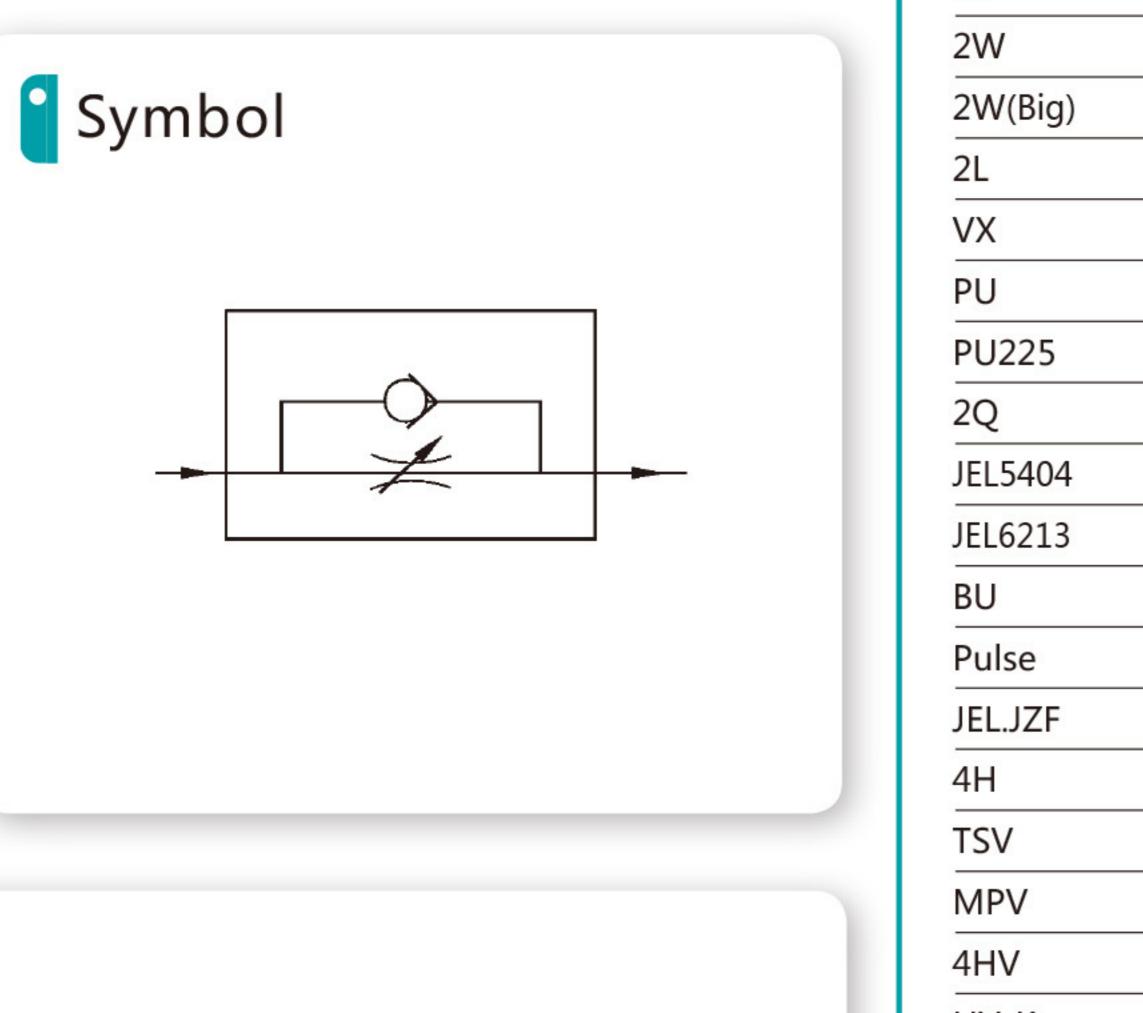


## Specification

Model	Accurate Type				Ordinary Type						
	ASC-06	ASC-08	ASC-10	ASC-15	RE-01	RE-02	RE-03	RE-04			
Port Size	G1/8"	G1/4"	G3/8"	G1/2"	G1/8"	G1/4"	G3/8"	G1/2"			
Working Medium	Air										
Working Pressure	0 ~ 0.95MPa										
Ambient Temperature	-20 ~ 70℃										

<sup>\*</sup> ASC-08B installation conforms to NUMAR standard to control the speed of executive unit.

## Valve J4V J4V100 J4V200 J4V300 J4V300 J4V400 MCS BM NAMUR **NAMUR** JEL10 3VJZF JELVD **JELVD** 3V1 2W(Big) JEL5404 JEL6213 Pulse JEL.JZF HV, K 4F210 4F210 QE, QEA

## Overall Dimension

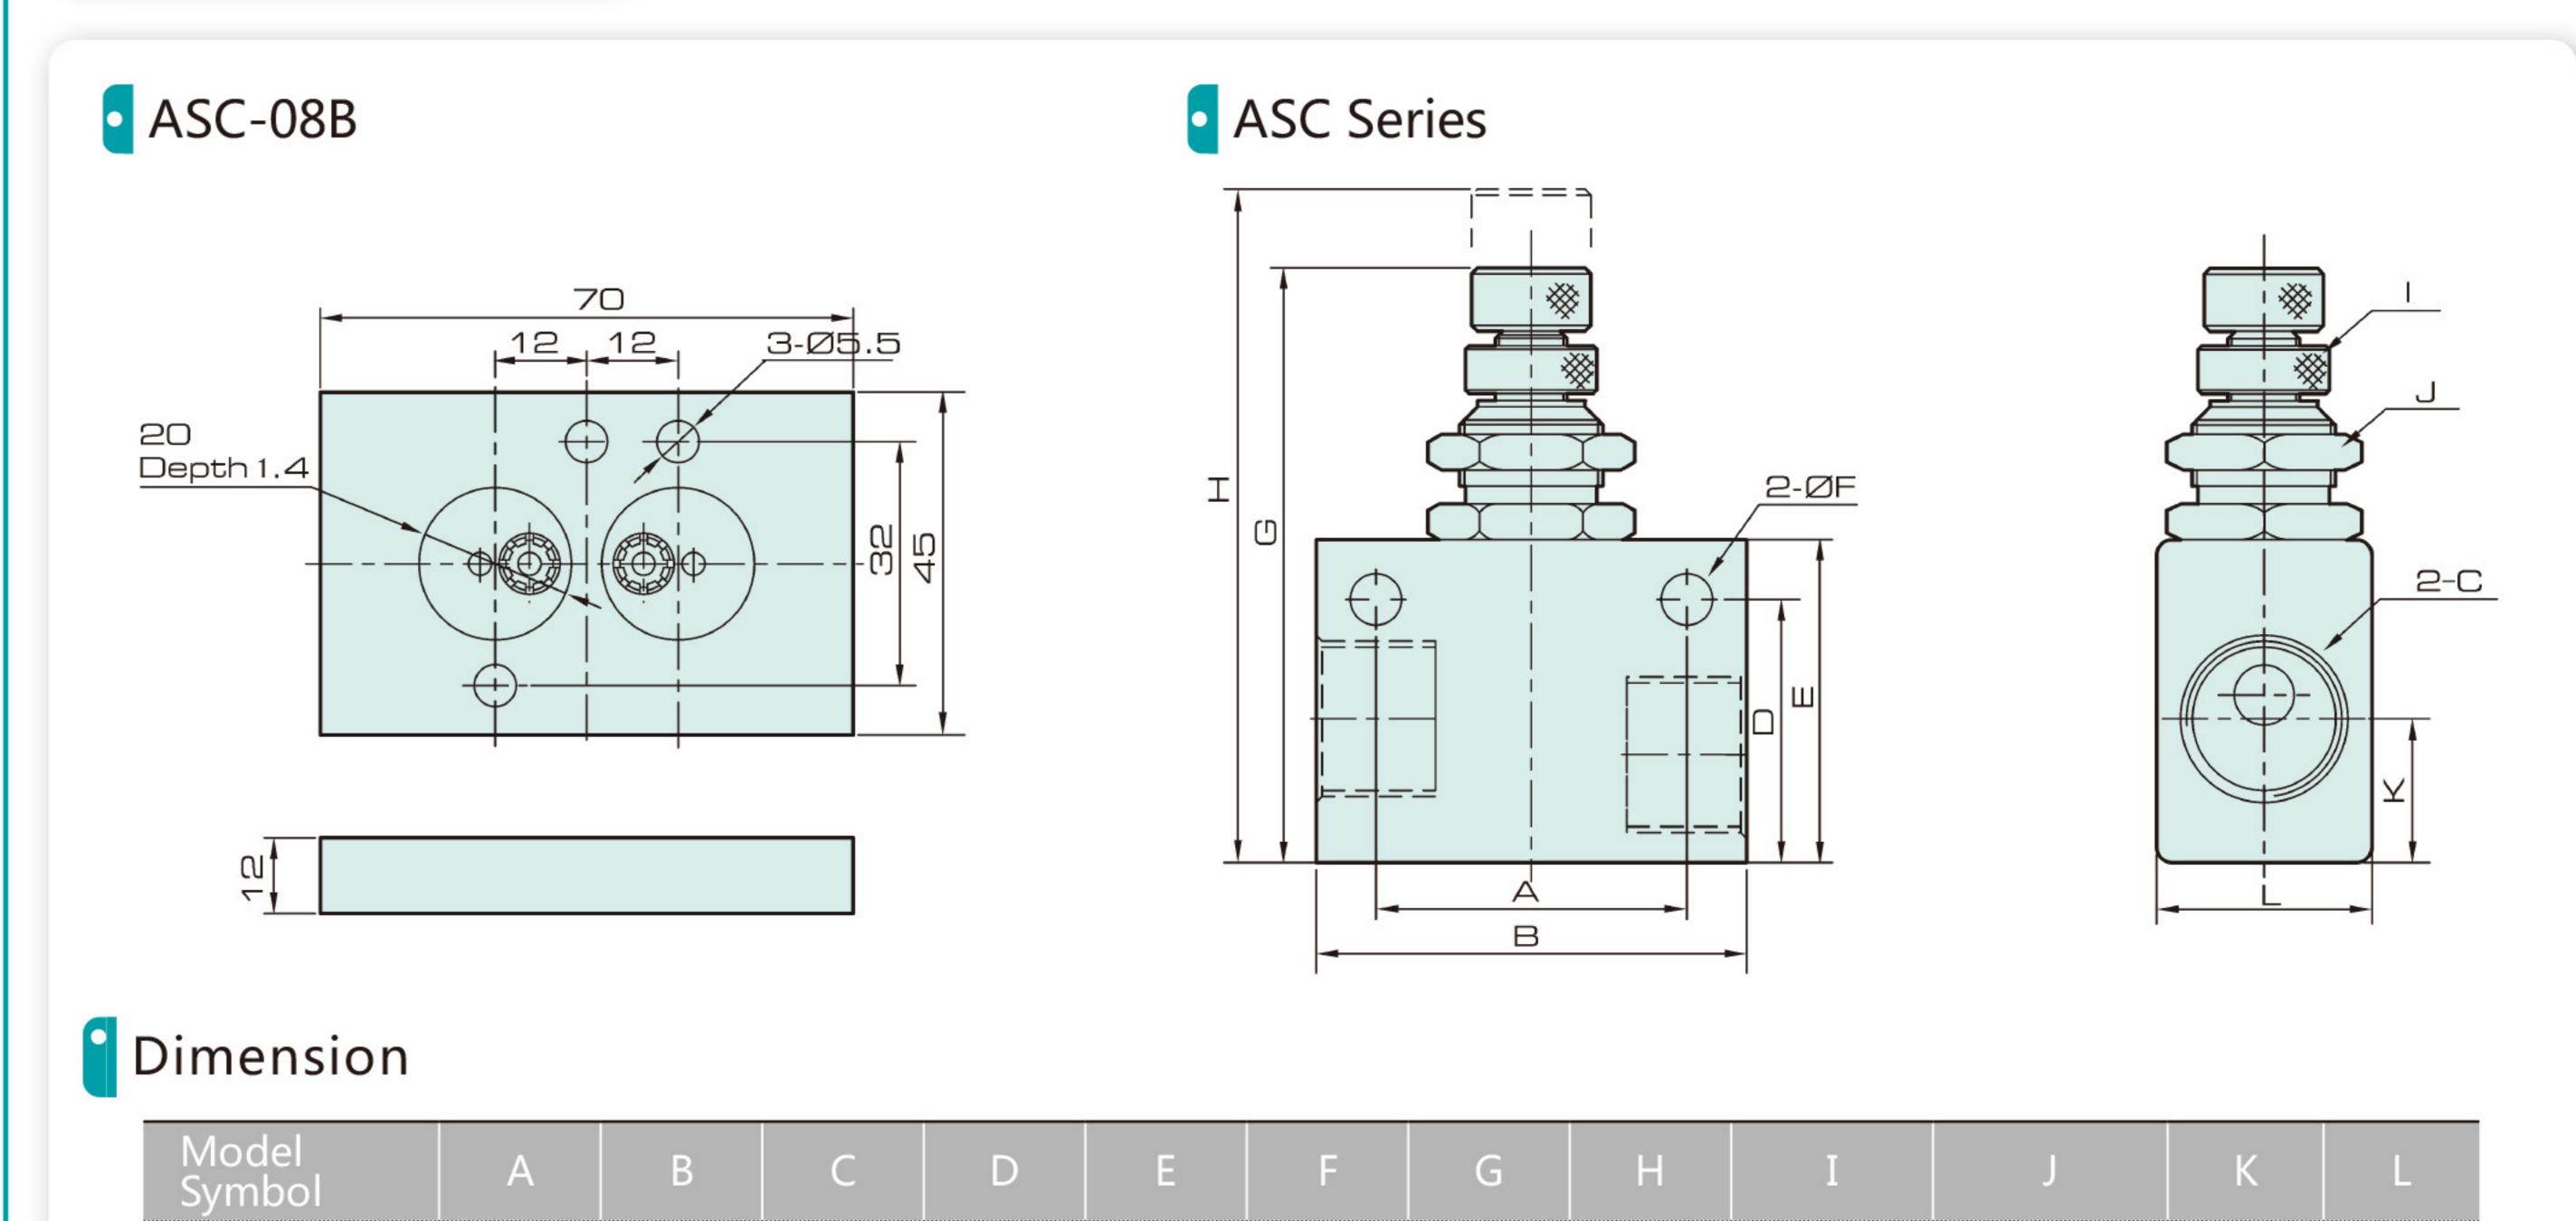

56.5

M6X0.5

M6X0.5

M6X0.5

M6X0.5

M12X0.75

M12X0.75

M12X0.75

M12X0.75

### Overall Dimension

ASC-06


ASC-08

ASC-10

RE Series

22

28

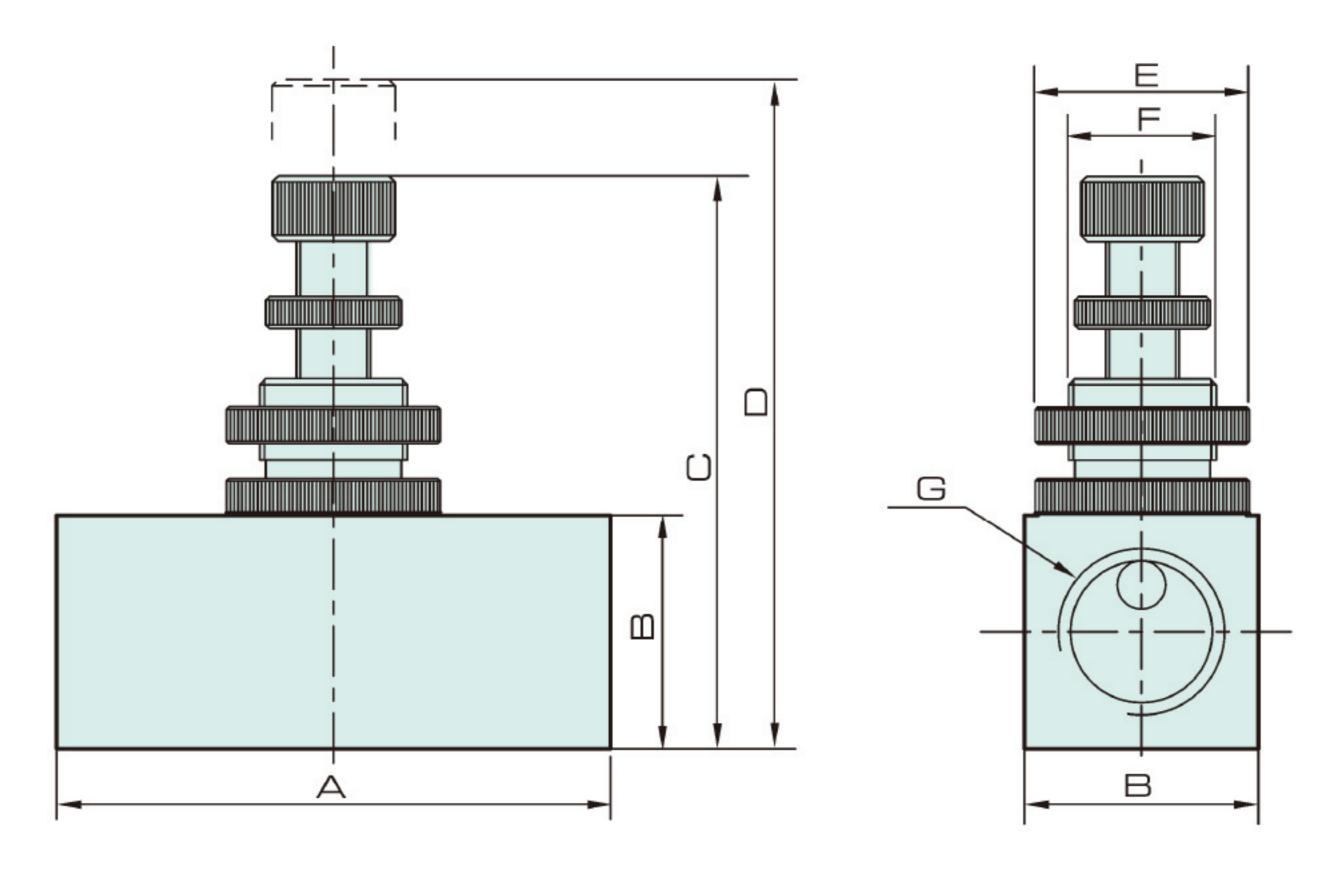

### Dimension

Model / Symbol	А	В	С	D	E	F	G
RE-01	45	19	43	50	Ф19	M14×1	G1/8
RE-02	45	19	43	50	Ф19	M14×1	G1/4
RE-03	55	25	55	62	Ф25	M18×1	G3/8
RE-04	55	25	55	62	Ф25	M18×1	G1/2