


- Valve
- J4V
- J4V100
- J4V200
- J4V300
- J4V400
- 5V
- Manifold
- JSY
- 5JV
- MCS
- JVT307
- JEL
- MVSD
- VF
- BM
- NAMUR
- 551
- JEL10
- 3VJZF
- Diaphragm
- JELVD
- 3V1
- Coil
- 2P
- 2V
- 2W
- 2W(Big)
- 2L
- VX
- PU
- PU225
- 2Q
- JEL5404
- JEL6213
- BU
- Pulse
- JELJZF
- 4H
- TSV
- MPV
- 4HV
- HV, K
- 4R
- 4F210
- FV
- MSV
- JM
- ASC, RE
- QE, QEA
- ST
- HSV

Coil

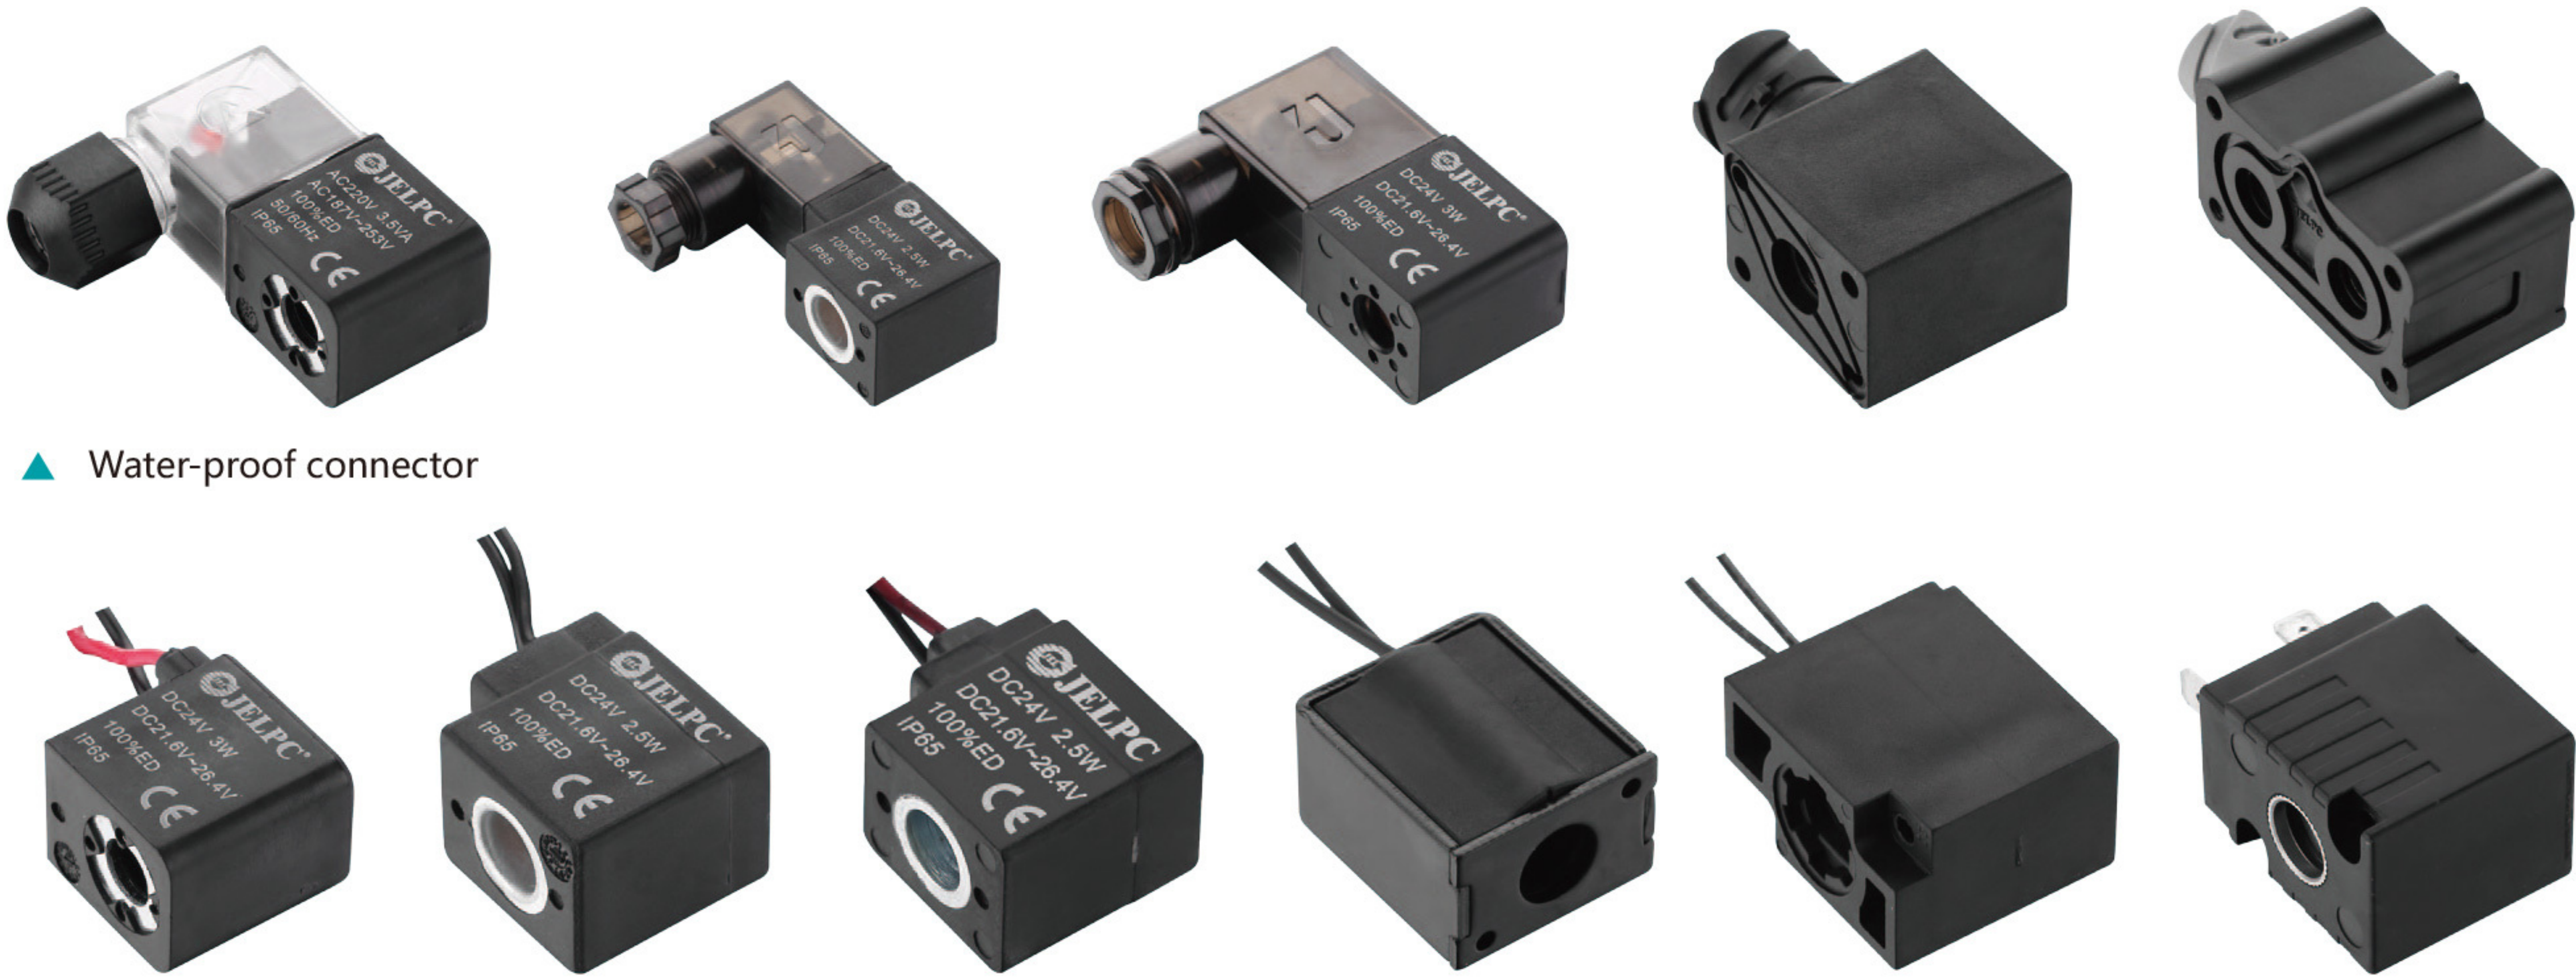

▲ Water-proof connector

Ordering Code

100C	AC220V	W
Specification	Standard Voltage	Wiring Type
100C: Coils for 100 Series	DC12V DC24V	Blank: Standard Connector
200C: Coils for 200/300/400 Series	AC24V 50Hz/60Hz	LD: Brown with Light Terminal
	AC110V 50Hz/60Hz	LD1: White with Light Terminal
	AC220V 50Hz/60Hz	W: Lead Wire
	AC380V 50Hz/60Hz	

There are thermosetting type and thermoplastic type are available for option of coil.

Specification

*Amisco (Italy) or NASS (Germany) coil is available.

Model	100C	200C
Power	DC: 2.5W AC: 2.5VA	AC: 3.5VA DC: 3W
Operation	100% ED	
Working Voltage	AC:24V, 110V, 220V, 380V DC:12V, 24V	
Ambient Temperature	-30 °C ~ 70 °C	
Protect Class	IP 65	
Insulation Class	F Class	
Wiring Form	Lead Wire Type, Connector Type	

* Customized power is available.

Seal Ring

*The key seals are imported from Japan or Germany.

