

MVSD Series Solenoid Valve



MVSD-260-4E1

MVSD-300-4E1

MVSD-600-4E1

Ordering Code

MVSD	260	4	E2	AC110V	W
Code	Body Width	4:5 Way	Stop Type	Standard Voltage	Wiring
	260: 26 mm 300: 30 mm 600: 68 mm		E1: Single coil E2: Double coil	DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	LD: Brown with light terminal LD1: White with light terminal W: Lead wire

Specification


Item	MVSD-260-4E1	MVSD-260-4E2	MVSD-260-4E2 (C.P.E)	MVSD-300-4E1	MVSD-300-4E2	MVSD-300-4E2 (C.P.E)	MVSD-600-4E1	MVSD-600-4E2
No. of Position	2	2	3	2	2	3	2	2
No. of Port	5			3	5		5	5
Port Size	G1/4"			G3/8"			G3/4"	G1"
Working medium	Air							
Working Pressure	0.2 ~ 0.7 MPa	0.3 ~ 0.7 MPa		0.2 ~ 0.7 MPa	0.3 ~ 0.7 MPa		0.2 ~ 0.7 MPa	0.2 ~ 0.7 MPa
Max. Test Pressure	10 kgf/cm ²							
Effective Cross Section Area	18 mm ²	16 mm ²		35 mm ²	25 mm ²		20: 115 mm ² 25: 135 mm ²	
Ambient Temperature	-20 ~ 70°C (No Freezing)							
Power Consumption			AC: 5.5 VA DC: 4.8 W				AC: 13 VA DC: 10 W	
Operating Voltage Tolerance	± 10%							
Insulation Class	IP 65, F Class							

MVSD Series Solenoid Valve


ISO9001:2015 CE

Overall Dimension


MVSD260-4E1

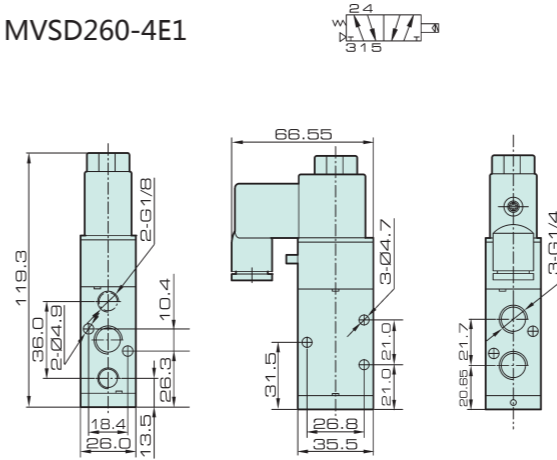

MVSD300-4E1

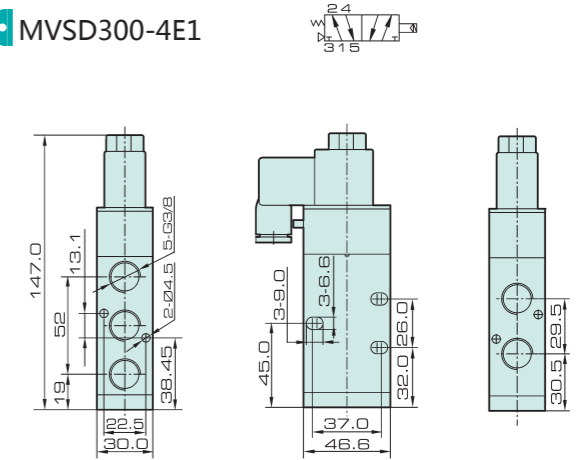

MVSD600-4E1

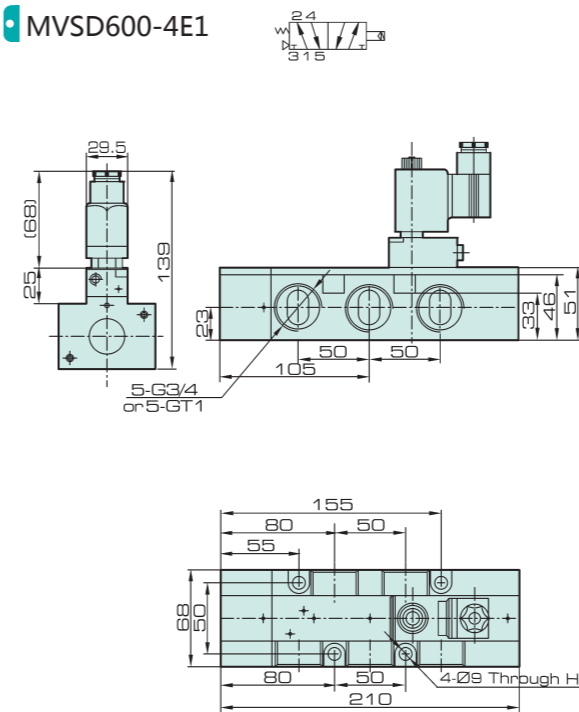

MVSD600-4E2

