

Vertical type/ Pipe connecting type Solenoid Pulse Valve



Valve

J4V

J4V100

J4V200

J4V300

J4V400

5V

Manifold

JSY

5JV

MCS

JVT307

JEL

MVSD

VF

BM

NAMUR

551

JEL10

3VJZF

Diaphragm

JELVD

3V1

Coil

2P

2V

2W

2W(Big)

2L

VX

PU

PU225

2Q

JEL5404

JEL6213

BU

Pulse

JELJZF

4H

TSV

MPV

4HV

HV, K

4R

4F210

FV

MSV

JM

ASC, RE

QE, QEA

ST

HSV

Feature

1. Brought in advanced design and improved.
2. Applied for dust clear of compressed air switch in dust cleaning system.
3. Key components materials are imported.
4. Air control type, solenoid type and anti explosion solenoid type are available.
5. Pipe type connecting ensures firmly and reliable installation.




Ordering Code

JEL	Z	20	P	J
JELPC	Z: Vertical type Slenoid Pulse Valve			
		Bore	Connection Form	Wiring
		Ø 20 Ø 50	Blank : Normal screw	J: Terminal
		Ø 25 Ø 62	A Tubing+threaded	
		Ø 35 Ø 76	P Screw	
		Ø 40 Ø 100	S Double diaphragm	
			J Threaded (economical type)	
			DD Pipe connecting type	

Specification

Model	Working-pressure	Ambient Temperature	Humidity	Applied Medium	Voltage	Diaphram life	Orifice	Thread
JEL-Z-20A							Ø20	G3/4"
JEL-Z-20P							Ø20	G3/4"
JEL-Z-20							Ø20	G3/4"
JEL-Z-25							Ø25	G1"
JEL-Z-25P							Ø25	G1"
JEL-Z-35P	0.3~0.8MPa	-10~55°C	< 85%	Pure Air	AC110V AC220V DC24V	Above 1 Million Times	Ø35	G1 ¹ / ₂ "
JEL-Z-40S							Ø40	G1 ¹ / ₂ "
JEL-Z-50S							Ø50	G2"
JEL-Z-62S							Ø62	G1 ¹ / ₂ "
JEL-Z-76S							Ø76	G3"
JEL-Z-100S							Ø100	Ø100

Overall Dimension

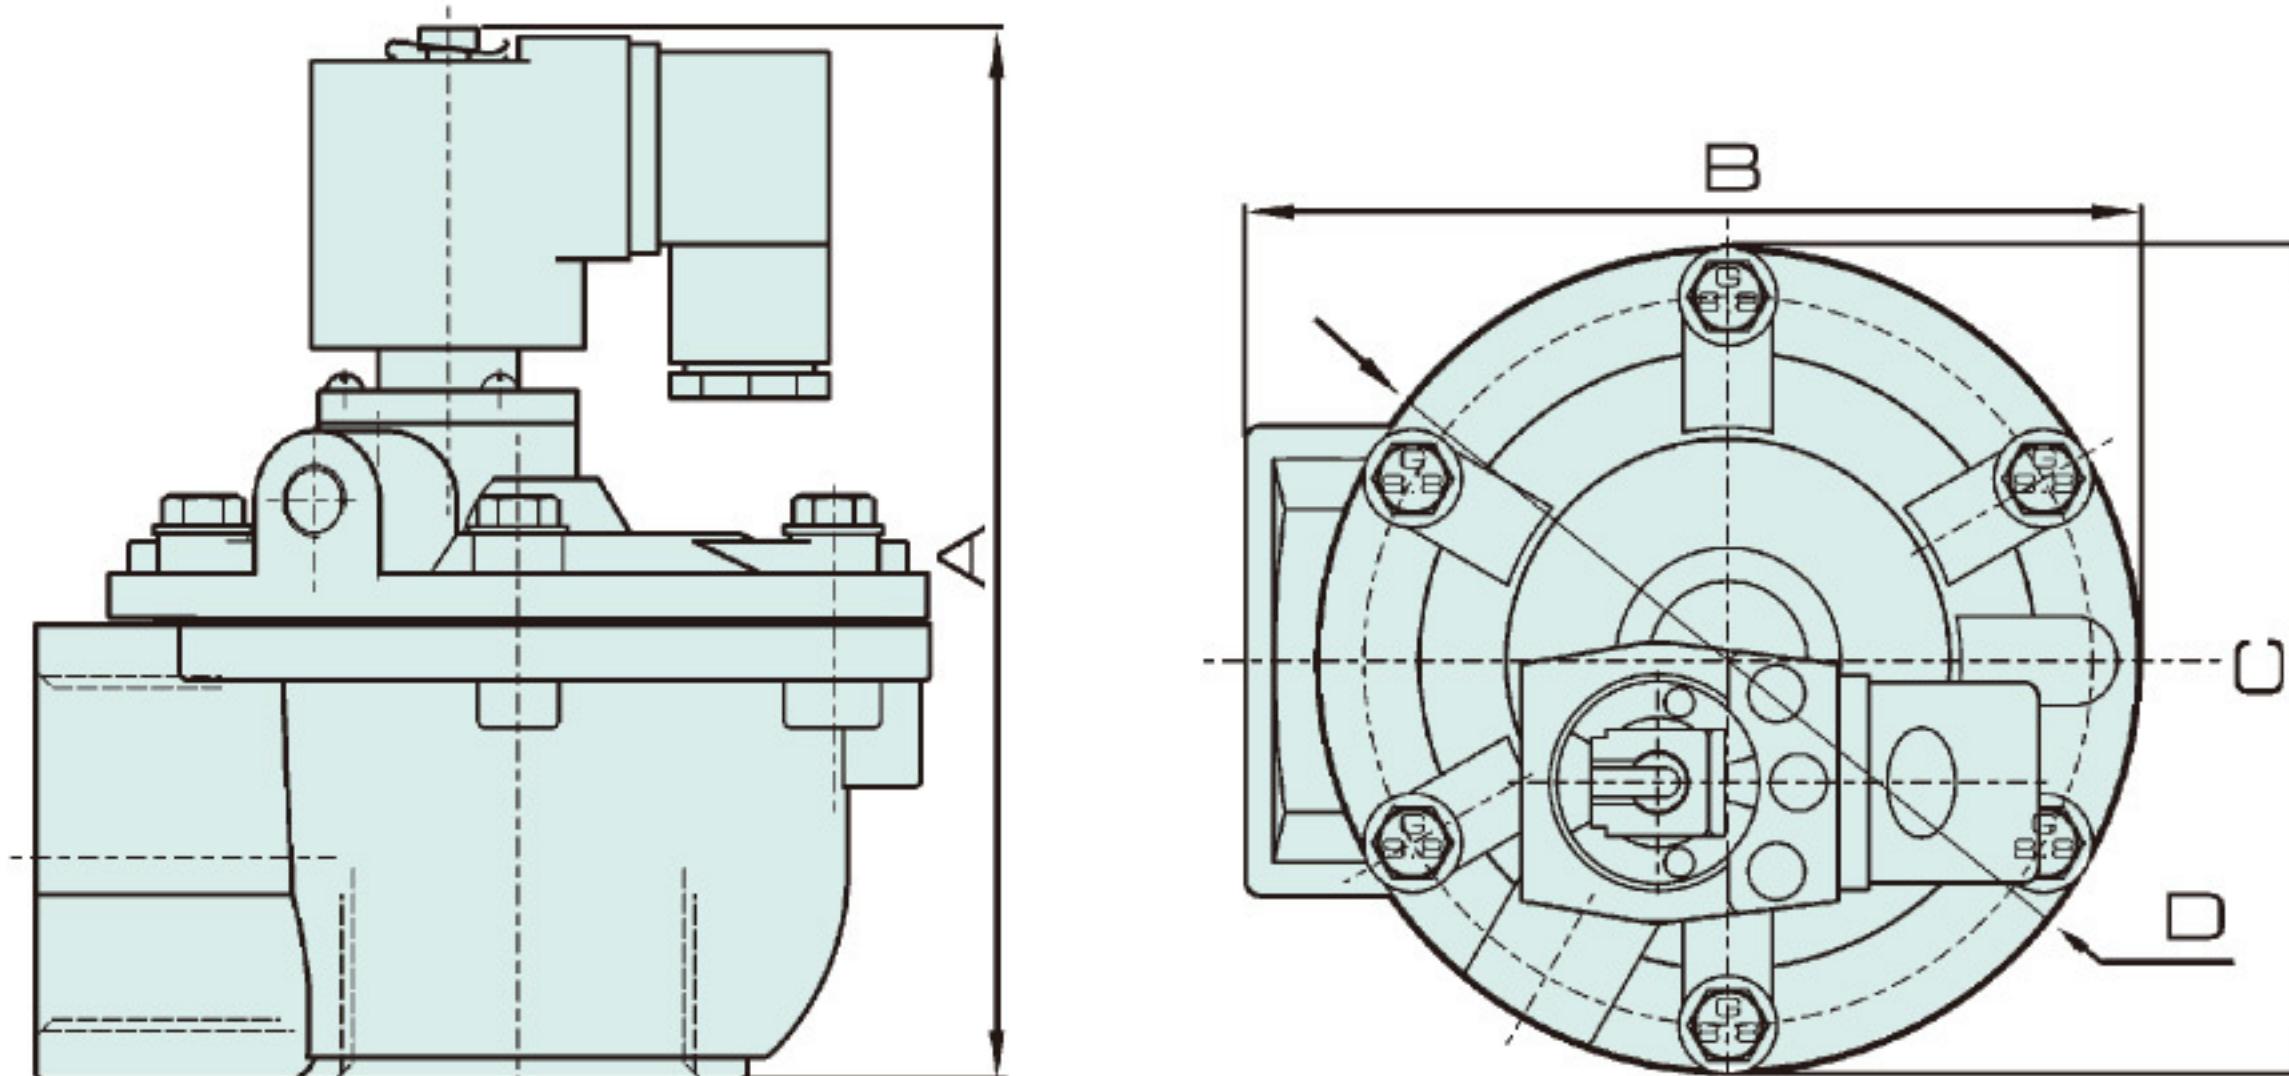

Model	JEL-Z-20A	JEL-Z-20P	JEL-Z-20	JEL-Z-25	JEL-Z-25P	JEL-Z-35P
A	173	124	110	110	124	142
B	145	105	90.5	90.5	105	121
C	-	82.5	75	75	82.5	-
D	Ø90	-	-	-	-	Ø112

Model	JEL-Z-40S	JEL-Z-50S	JEL-Z-62S	JEL-Z-76S	JEL-Z-100S
A	166	202	222	245	356.5
B	132	210	210	230.5	286.5
C	-	-	-	-	-
D	Ø137	Ø185	Ø185	Ø200	Ø221