




Ordering Code

HSV	01	N
Series	Port Size	Thread Type
Hand sliding series	01: G1/8"	N: Female thread
	02: G1/4"	Blank: Male thread
	03: G3/8"	
	04: G1/2"	

Feature

2/3 Hand sliding valve can be used as switch of Air source. When Air source is switched off, the remained air in system can be released.

Symbol

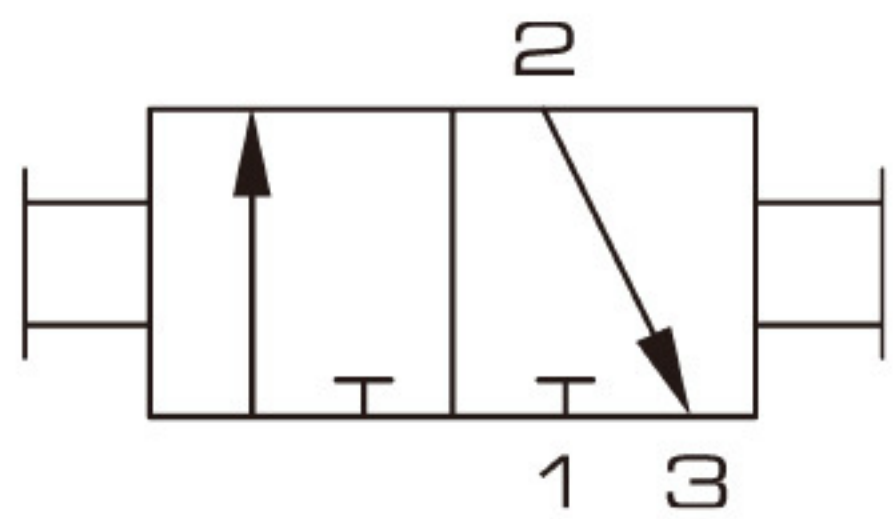


Specification


Model	HSV-01	HSV-02	HSV-03	HSV-04
Port Size	G1/8"	G1/4"	G3/8"	G1/2"
Orifice Size	4mm	7mm	10mm	12mm
Working Medium	Filtered and Compressed Air			
Working Pressure	0~1.0MPa			
Ambient Temperature	-20 ~ 70°C			
Operating Force	20N			

Overall Dimension

Female thread

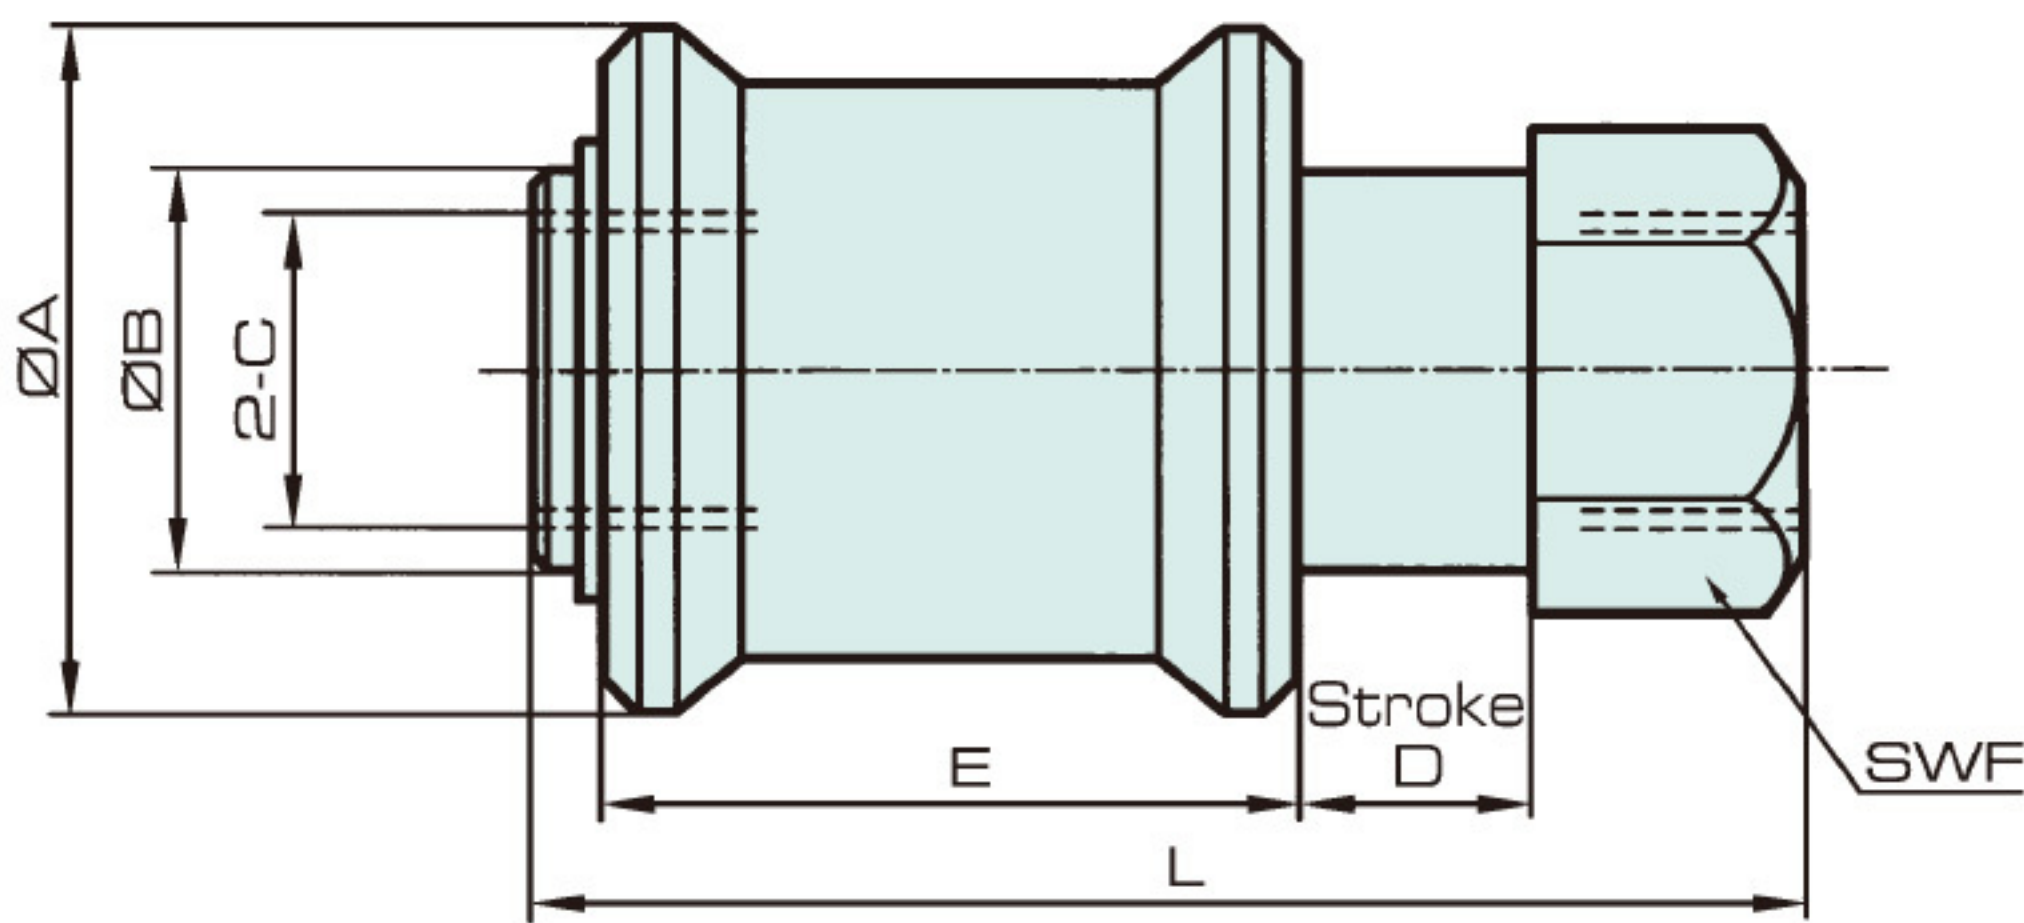

Male thread

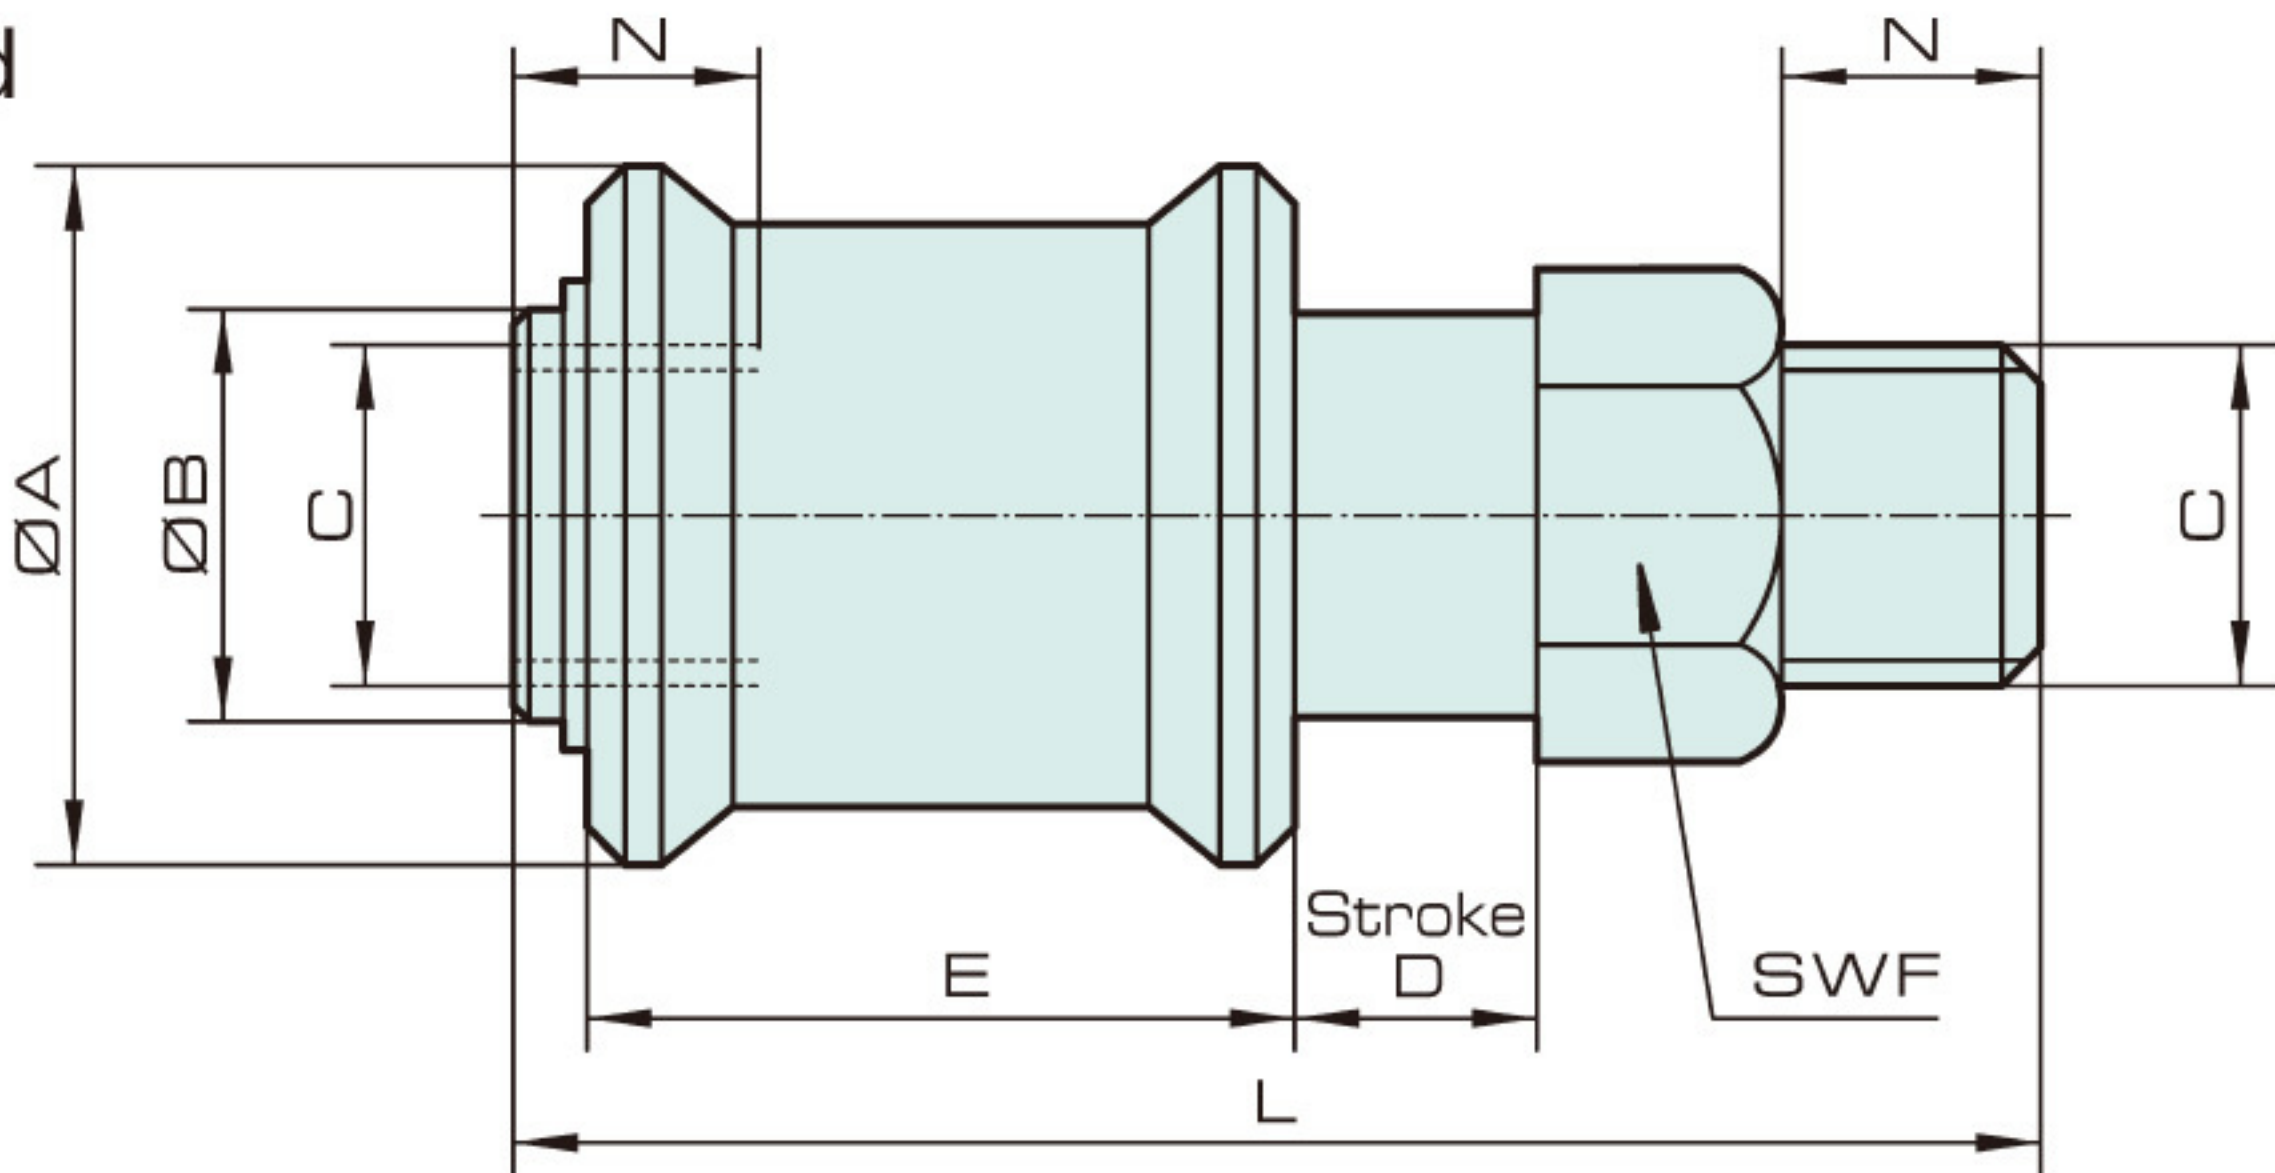

Dimension

Model/ Symbol	A	B	C	D	E	F	L
HSV-01N	20	13	G1/8	5.5	20	14	32
HSV-02N	27	18	G1/4	9.5	32	19	48
HSV-03N	30	21	G3/8	9.5	32	22	48
HSV-04N	38	24	G1/2	17	40	27	70

Model/ Symbol	A	B	C	D	E	F	N	L
HSV-01	20	13	G1/8	5.5	20	14	6	38
HSV-02	27	18	G1/4	9.5	32	19	10	58
HSV-03	30	21	G3/8	9.5	32	22	10	58
HSV-04	38	24	G1/2	17	40	27	10	80

Valve

J4V
J4V100
J4V200
J4V300
J4V400
5V
Manifold
JSY
5JV
MCS
JVT307
JEL
MVSD
VF
BM
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(Big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
BU
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV